

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
25 October 2001 (25.10.2001)

PCT

(10) International Publication Number  
**WO 01/80510 A1**

(51) International Patent Classification<sup>7</sup>: **H04L 27/26**

(21) International Application Number: PCT/US01/12555

(22) International Filing Date: 18 April 2001 (18.04.2001)

(25) Filing Language: — English

(26) Publication Language: English

(30) Priority Data:  
60/197,727 18 April 2000 (18.04.2000) US

(71) Applicant: **AWARE, INC.** [US/US]; 40 Middlesex Turnpike, Bedford, MA 01730 (US).

(72) Inventor: **TZANNES, Marcos, C.**; 121 LaEspiral, Orinda, CA 94563 (US).

(74) Agent: **VICK, Jason, H.**; Nixon Peabody LLP, Suite 800, 8180 Greensboro Drive, McLean, VA 22102 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).


**Published:**

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

[Continued on next page]

(54) Title: SYSTEMS AND METHODS FOR A MULTICARRIER MODULATION SYSTEM WITH A VARIABLE MARGIN

(57) Abstract: A multicarrier modem has a plurality of carriers over which data is transmitted. By assigning, for example, one or more different margins to the individual carriers, the data rate and impairment immunity can be increased.

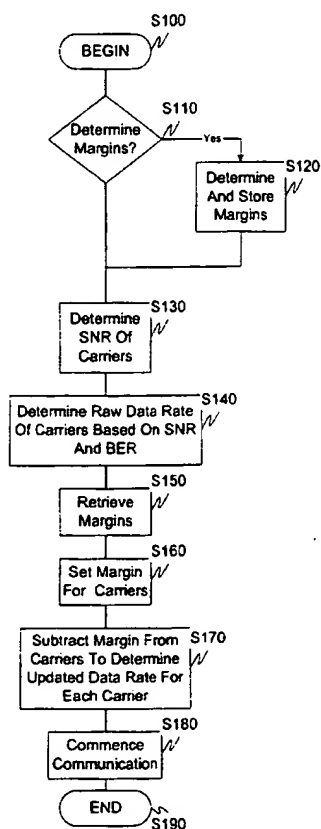

WO 01/80510 A1



*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

## DATA ALLOCATION WITH VARIABLE SNR MARGINS

**Background of the Invention****Field of the Invention**

**[0001]** This invention relates to communications technologies. In particular, this invention relates to multicarrier modulation systems having multiple margins.

**Description of Related Art**

**[0002]** Multicarrier modulation, or Discrete Multitone Modulation (DMT), is a transmission method that is widely used for communication over difficult media. Multicarrier modulation divides the transmission frequency band into multiple subchannels, i.e., carriers or bins, with each carrier individually modulating a bit or a collection of bits. A transmitter modulates an input data stream containing information bits with one or more carriers, i.e., bins or subchannels, and transmits the modulated information. A receiver demodulates all the carriers in order to recover the transmitted information bits as an output data stream.

**[0003]** Multicarrier modulation has many advantages over single carrier modulation. These advantages include, for example, a higher immunity to impulse noise, a lower complexity equalization requirement in the presence of multipath, a higher immunity to narrow band interference, a higher data rate and bandwidth flexibility. Multicarrier modulation is being used in many applications to obtain these advantages, as well as for other reasons. These applications include Asymmetric Digital Subscriber Line (ADSL) systems, wireless LAN systems, power line communications systems, and other applications. ITU standards G.992.1 and G.992.2 and the ANSI T1.413 standard specify standard implementations for ADSL transceivers that use multicarrier modulation.

**[0004]** Discrete multitone modulation transceivers modulate a number of bits on each subchannel, the number of bits depending on the Signal to Noise Ratio (SNR) of that subchannel and the Bit Error Rate (BER) requirement of a link. For example, if the required BER is  $1 \times 10^{-7}$ , i.e., one bit in ten million is received in error on average, and the

- 2 -

SNR of a particular subchannel is 21.5 dB, then that subchannel can modulate 4 bits, since 21.5 dB is the required SNR to transmit 4 QAM bits with a  $1 \times 10^{-7}$  BER. Other subchannels can have a different SNR and therefore may have a different number of bits allocated to them at the same BER. Additional information regarding bit loading can be found in copending U.S. Application Serial No. 09/510,773, incorporated herein by reference in its entirety.

**[0005]** In many DMT systems, an additional parameter is used to determine the number of bits allocated to each subchannel. This parameter is called the SNR "margin," or simply the "margin." The margin specifies an extra SNR per subchannel, in addition to what is required to maintain the specified BER requirement. As an example, a DMT system with a 6 dB margin would require a  $21.5+6=27.5$  dB SNR on a subchannel in order to transmit 4 bits on that subchannel with a  $1 \times 10^{-7}$  BER. This is 6 dB more than required by the example in the previous paragraph because now a 6 dB margin is added to the system. Another way of looking at this is that in the example of the previous paragraph, where 4 bits were allocated to a subchannel with 21.5 dB SNR, the margin was 0 dB.

**[0006]** DMT transceivers use a margin to increase the system's immunity to various types of time varying impairments. Examples of these impairments in DSL systems are: changes in the levels of crosstalk from other transmission systems, impulse noise, temperature changes in the telephone line, or the like. When a DMT system is operating with a positive SNR margin, the noise can change instantaneously by the level of the margin and the system will still maintain the required BER. For example, if the system is operating at a 6 dB margin, e.g., 4 bits are allocated to carriers with 27.5 dB SNR for  $\text{BER}=1 \times 10^{-7}$ , the crosstalk levels can increase by 6 dB and the system will still be operating at the required  $1 \times 10^{-7}$  BER. Obviously the penalty for this increase in robustness is a decrease in the data rate, since with a 0 dB margin, a subchannel with 27.5 dB SNR can modulate 6 bits at  $1 \times 10^{-7}$  BER.

**[0007]** Therefore, there is a tradeoff between the robustness of the channel, such as a phone line, and the achievable data rate. The margin can be used to quantify this tradeoff. A higher margin results in a higher level of immunity to changing channel conditions at the expense of the achievable data rate. Likewise, a lower margin results in a higher data rate at the expense of a lower immunity to changing channel conditions.

- 3 -

[0008] Current DMT systems allocate a fixed margin to all subchannels. For example, ADSL systems typically use a 6 dB margin on all subchannels carrying data bits. This 6 dB margin is constant on all subchannels and is independent of the type of impairment that the margin is trying to protect against.

### SUMMARY OF THE INVENTION

[0009] For simplicity of reference, the systems and methods of this invention will hereinafter refer to the transceivers, or multicarrier modems, generically as modems. One such modem is typically located at a customer premises such as a home or business and is "downstream" from a central office with which it communicates. The other modem is typically located at the central office and is "upstream" from the customer premises. Consistent with industry practice, the modems are often referred to as "ATU-R" ("ADSL transceiver unit, remote," i.e., located at the customer premises) and "ATU-C" ("ADSL transceiver unit, central office," i.e., located at the central office). Each modem includes a transmitter section for transmitting data and a receiver section for receiving data, and is of the discrete multitone type, i.e., the modem transmits data over a multiplicity of subchannels of limited bandwidth. Typically, the upstream or ATU-C modem transmits data to the downstream or ATU-R modem over a first set of subchannels, which are usually the higher-frequency subchannels, and receives data from the downstream or ATU-R modem over a second, usually smaller, set of subchannels, commonly the lower-frequency subchannels.

[0010] For example, in digital subscriber line (DSL) technology, communications over a local subscriber loop between a central office and a subscriber premises is accomplished by modulating the data to be transmitted onto a multiplicity of discrete frequency carriers which are summed together and then transmitted over a subscriber loop. Individually, the carriers form discrete, non-overlapping communication subchannels which are of a limited bandwidth. Collectively, the carriers form what is effectively a broadband communications channel. At the receiver end, the carriers are demodulated and the data recovered.

[0011] DSL systems experience disturbances from other data services on adjacent phone lines, such as, for example, ADSL, HDSL, ISDN, T1, or the like. Additionally, DSL systems may experience disturbances from impulse noise, crosstalk, temperature changes, or the like. These disturbances may commence after the subject DSL service is already

- 4 -

initiated and, since DSL for Internet access is envisioned as a always-on service, the effects of these disturbances should be considered by the subject DSL transceiver. Additionally, the length of the phone line is a type of impairment that varies from one ADSL subscriber to another, i.e. from one ADSL installation to another, and therefore has an effect on the ADSL modem performance.

[0012] The systems and methods of this invention allow the margin in a discrete multitone modulation system to vary depending on a type of impairment. For example, this impairment can be changing over some duration or from one installation to another. Thus, different margins can be assigned to one or more of the carriers in a discrete multitone modulation communication system.

[0013] As noted above, there is a tradeoff between the robustness of the link and the achievable data rate. By setting a higher margin, a higher level of immunity to changing channel conditions is achieved at the expense of the data rate. Similarly, while a lower margin may result in a higher data rate, the immunity to changing channel conditions is reduced.

[0014] However, setting the margin equally for all subchannels at least fails to account for impairments that change over time and how the impairments may have different effects on subchannels at different frequencies. For example, temperature changes and line length effect different frequencies with differing degrees of interference.

[0015] Aspects of the present invention relate to a communications system having a plurality of margins.

[0016] Aspects of the present invention also relates to a method of assigning a plurality of margins to a communications system.

[0017] Aspects of this present invention additionally relate to multicarrier modulation systems and methods for different margins to be assigned to different subchannels to account for varying impairments.

[0018] These and other features and advantages of this invention are described in, or are apparent from, the following detailed description of the embodiments.

### **BRIEF DESCRIPTION OF THE DRAWINGS**

[0019] The embodiments of the invention will be described in detail, with reference to the following figures wherein:

[0020] Fig. 1 is a functional block diagram illustrating an exemplary modem according to this invention; and

[0021] Fig. 2 is a flowchart outlining an exemplary method for assigning margins according to this invention.

### **DETAILED DESCRIPTION OF THE INVENTION**

[0022] In an exemplary embodiment of the invention, the margin is set to be different on at least two subchannels in a discrete multitone modulation system. In this exemplary embodiment, subchannels which are expected to incur greater variations in impairment levels are set to have a higher margin, whereas subchannels which are expected to incur lower variations in impairment levels are set to have lower margins. As an example of this embodiment, consider an ADSL transmission system transmitting data over telephone wires and consider the case where the impairment is changing channel conditions due to temperature fluctuations. Since telephone wire is typically made out of copper, the attenuation, i.e., the insertion loss, characteristics will depend on the temperature of the wire. As the temperature of the wire increases, the attenuation, i.e., the insertion loss, will increase. Furthermore, the insertion loss also varies with frequency as the temperature changes. Therefore, as the temperature increases, in addition to an overall increase in insertion loss, the insertion loss at the higher frequencies increases more than the insertion loss at the lower frequencies. Table 1 shows a correlation of frequency versus insertion loss of an exemplary 13,500 ft. 26 AWG line at various frequencies for 70°F and 120°F.

- 6 -

Frequency (kHz)											
	20	40	100	200	260	300	400	500	600	780	1100
Insertion loss (dB) at 70° F	29.8	36.7	45.2	52.8	57.3	60.2	67.7	74.8	81.7	93.0	110
Insertion loss (dB) at 120° F	31.9	39.6	49.4	57.4	61.8	64.8	72.3	79.3	86.1	97.9	116

**TABLE 1:** Insertion loss of 13500 ft 26 AWG line versus frequency at 70F and 120F

[0023] From Table 1, it is apparent that the difference in insertion loss from 120°F to 70°F is 2.1 dB at 20 kHz, whereas the difference in insertion loss from 120°F to 70°F is 6 dB at 1100 kHz. For this exemplary embodiment, a higher margin could be allocated to carriers at higher frequencies and a lower margin allocated to carriers at lower frequencies. For example, the carrier at 20 kHz will only need a 2.1 dB margin, because even if the temperature changes from 70°F to 120°F, the insertion loss will only change by 2.1 dB and, as a result, the system bit error rate requirement can still be met after the temperature change. Similarly, the carrier at 1100 kHz will need a 6 dB margin, since as the temperature changes from 70°F to 120°F, the insertion loss will change by 6 dB and, as a result, the system bit error rate requirement will still be satisfied even after the temperature change.

[0024] However, it is to be appreciated that the margin is not allocated to each subchannel in a fixed manner, but rather varies based on the expected change in impairments over time or as impairments vary from one DSL installation to another. However, that does not preclude the possibility that different subchannels can have the same margin assigned to them. For example, a subchannel may have a certain margin assigned based on a particular impairment, while another subchannel may have the same margin assigned based on another impairment. These impairments can include, but are not limited to, changes in the levels of crosstalk from other transmission systems, impulse noise, temperature changes, line length, radio frequency interference and other ingress, or the like. As a result, for example, since certain subchannels are not overly burdened with a common margin, the overall data rate of the system can be increased without sacrificing the robustness of the system.



- 7 -

[0025] For example, and with reference to Table 1, by lowering the margin of the lower carriers from 6 dB to 2.1 dB, the channel data rate has increased. This increase can occur without a loss of the immunity to temperature variations on the line since the lower frequencies are less susceptible to temperature changes than the higher frequencies. In general, the systems and methods of this invention can be adapted to set a margin for any impairment that varies over time, or is installation based, and may, for example, effect different frequencies in different ways.

[0026] As another example, consider crosstalk from another transmission system. If the crosstalking transmission system is known to use only a portion of the frequency spectrum utilized by the discrete multitone modulation system, then the margins can be decreased on the carriers that are known to be outside the frequency spectrum of the crosstalking system. For example, ISDN systems are an example of a crosstalk source for ADSL systems. ISDN systems typically transmit only up to approximately 150 kHz. Thus, for example, employing the teachings of this invention, carriers above 150 kHz can operate at lower margins than carriers below 150 kHz where the ISDN crosstalk is present.

[0027] As another example, the margin in an ADSL system can be varied depending on the length of the telephone wire. Table 2 shows a relationship of insertion loss of an exemplary 9000 ft. 26 AWG line at frequencies for 70°F and 120°F.

	Frequency (kHz)										
	20	40	100	200	260	300	400	500	600	780	1100
Insertion loss (dB) at 70° F	20.0	24.4	30.1	35.2	38.2	40.2	45.1	49.9	54.4	62.0	73.6
Insertion loss (dB) at 120° F	21.4	26.3	32.8	38.2	41.2	43.2	48.2	52.9	57.4	65.3	77.5

TABLE 2: Insertion loss of 9000 ft 26 AWG line versus frequency at 70F and 120F

[0028] Comparing Table 1 and Table 2, it is apparent that an increase in insertion loss as temperature increases depends on the length of the telephone line as well. Thus, on the exemplary 9,000 ft. phone line, a 50°F temperature change results in an average of only 2.8 dB increase in insertion loss. On the 13,500 ft. phone line, a 50°F temperature change resulted in an average of 4.3 dB increase in insertion loss. For this illustrative example, the

- 8 -

margin on the subchannels is varied depending on the length of the phone line. As an example, if the phone line is shorter, e.g., 9,000 ft., the average margin can be decreased on the subchannels by  $4.3 - 2.8 = 1.5$  dB as compared to a longer 13,500 ft. loop without sacrificing immunity to temperature changes on the phone line. This is possible because a shorter phone line will not experience as much of a change in insertion loss due to temperature changes as a longer phone line.

[0029] For this illustrative example, the margin allocated to different subchannels takes into account information about the length of the telephone line. As an example, the insertion loss difference from 70°F to 120°F at 20 kHz is 2.1 dB for the 13,500 ft. line. On the other hand, the insertion loss difference from 70°F to 120°F at 20 kHz is 1.4 dB for the 9,000 ft. line. Therefore, for this exemplary situation, a margin of 2.1 dB would be allocated to the carrier at 20 kHz on a 13,500 ft. line whereas a margin of 1.4 dB would be allocated to the carrier at 20 kHz on the 9,000 ft. line. The immunity to temperature variations on the line would be the same for both the systems operating at 9,000 ft. and 13,500 ft. As a result, the overall system data rate can be increased on shorter lines without sacrificing a loss in robustness.

[0030] Fig. 1 illustrates an exemplary embodiment of a multicarrier modem 100. In particular, the multicarrier modem 100 comprises a controller 10, a memory 20, a discrete multitone modulation system 30, a data rate determiner 40, a signal to noise ratio determiner 50, a margin determiner 60 and a margin storage 70, all interconnected by link 5. The multicarrier modem 100 is also connected to one or more computer or computer-type devices 80 and additional modems (not shown) via communications link 10. For ease of illustration, the multicarrier modem 100 has been illustrated in block diagram format with only the components needed for the exemplary embodiment of this invention. Additional information and further discussion of the operation and structure of an exemplary multicarrier modem can be found in copending U.S. Patent Application Serial No. 09/485,614 entitled "Splitterless Multicarrier Modem," incorporated herein by reference in its entirety.

[0031] While the exemplary embodiment illustrated in Fig. 1 shows the multicarrier modem 100 and various components collocated, it is to be appreciated that the various components of the multicarrier modem can be rearranged and located in whole or in part at

- 9 -

an ATU-R and/or ATU-C. Furthermore, it is to be appreciated, that the components of the multicarrier modem 100 can be located at various locations within a distributed network, such as a POTS network, or other comparable telecommunications network. Thus, it should be appreciated, that the components of the multicarrier modem 100 can be combined into one device or distributed amongst a plurality of devices. As will be appreciated from the following description, and for reasons of computational efficiency, the components of the multicarrier modem can be arranged at any location within a telecommunications network and/or modem without affecting the operation of the system.

[0032] The links 5 and 10 can be a wired or a wireless link or any other known or later developed element(s) that is capable of supplying and communicating electronic data to and from the connected elements. Additionally, the computer device 80, can be, for example, a personal computer or other device. In general, the computer device 80 can be any device that uses a modem to transmit and/or receive data.

[0033] In operation, the multicarrier modem 100 is installed, for example, in a customer premises or in a central office. During this installation, certain fixed quantities such as line length are known and can be stored in the multicarrier modem 100. During an initial installation, or at any subsequent time for which a redetermination in margins is appropriate, for example, based on an increased bit error rate, changes in the signal to noise ratio, seasonal changes, or the like, the controller 10, in cooperation with the memory 20, the discrete multitone modulation system 30 and the margin determiner 60 can determine and store margins. For example, as illustrated above in exemplary Tables 1 and 2, margins can be determined for temperature fluctuations and the length of the wire line based on, for example, the actual installation and historical data. Furthermore, routines can be established by the margin determiner 60 to evaluate and compile statistical information relating to one or more carriers. For example, this statistical information can be compiled during modem idle times in response to impairments seen on the one or more carriers. This statistical information can then be used to determine appropriate margins for one or more carriers.

[0034] Alternatively the modem may measure the noise on the line during idle times and determine that a particular type of crosstalker, e.g., another ADSL or HDSL modem, is present. Since the spectral content of these types of crosstalkers are known, this information can be used to determine the margin. For example, if the crosstalker is an ATU-R ADSL

- 10 -

modem then it is known that ATU-R ADSL modems transmit approximately in the 20-130 kHz range. This information can be used to determine the margin for the carriers in the 20-130 kHz frequency range.

[0035] Alternatively, a predetermined set of margins, for example, for known impairments, can be downloaded from, for example, a central office modem or other location within a communications network. The determined and/or downloaded margins are then stored in the margin storage 70. Similarly, groups of margins can be stored based on, for example, geographic information, seasonal information, line length information, or the like.

[0036] During training of the multicarrier modem 100, the SNR determiner 50, in cooperation with the controller 10, the memory 20, and the DMT system 30, determines the signal to noise ratio of the carriers. Knowing the signal to noise ratio of the carriers, the data rate determiner 40 determines the raw data rate of the carriers based on the signal to noise ratio and the bit error rate. This raw data rate reflects the data rate of carriers with no margin.

[0037] Generally, the bit error rate is set in advance, for example, by the manufacturer. Additionally, the data rate is generally governed by a range that is, for example, guaranteed as a maximum, by a DSL provider. Therefore, based on the set bit error rate, the signal to noise ratio for a known quantity of bits can be determined.

[0038] Knowing the signal to noise ratio, the margins for the carriers can be set, for example, based on one or more, or a combination of, entered criteria or determined criteria. For example, an entered criteria can be based on the loop length. A determined criteria can be, for example, based on standard temperature variance information that can, for example, be downloaded from the service provider. Alternatively, for example, the margins can be set based on historical data that relates to, for example, impairments on the line. In general, the margins can be set such that a balance between the data rate and the impairment immunity is maximized.

[0039] Having retrieved the margins for one or more of the carriers, the margins are set in the DMT system 30. The margins can then be subtracted from the carrier to determine an

- 11 -

updated data rate for each carrier. Having set the margins, and knowing the data rate, the DMT system can then commence communication over the communications link 10.

[0040] Fig. 2 illustrates an exemplary method of assigning margins to carriers according to an exemplary embodiment of this invention. In particular, control begins in step S100 and continues to step S110. In step S110, a determination is made whether margins are to be determined. If margins are to be determined, control continues to step S120. Otherwise, control jumps to step S130.

[0041] In step S120, the margins are determined and stored. Control then continues to step S130.

[0042] In step S130, the signal to noise ratio of the carriers are determined. Next, in step S140, the raw data rate of the carriers is determined based on the signal to noise ratio and the bit error rate. Next, in step S150, the margins for the carriers are retrieved. Control then continues to step S160.

[0043] In step S160, the margins for the carriers are set. Next, in step S170, the margins are subtracted from the carriers to determine an updated data rate for each carrier. Control then continues to step S180.

[0044] In step S180, communications commence. Control then continues to step S190 where the control sequence ends.

[0045] However, it is to be appreciated that the steps in Fig. 2 need not occur in the order illustrated. For example, at any point in time there could be an option to re-determine the margins. Similarly, based on, for example, the time of the day, day, location, error rate, service provider directive, a change in the quality of service requirement, or the like, the margins could be adjusted. Alternatively, at any time, updated margins could be downloaded and stored in the margin storage. Alternatively, if it known that margins will be incorporated in the determination of the data rate, step S140 could be bypassed since it is known that the raw data rate will not be used.

[0046] Furthermore, the systems and methods of this invention can also apply to any multicarrier modulation based communication system including wireless LANs, such as wireless LAN 802.11 and ETSI Hyperlan standards, wireless access systems, home and access power-line communication systems, or the like.

- 12 -

[0047] As illustrated in Fig. 1, the multicarrier modem and related components can be implemented either on a DSL modem, or a separate program general purpose computer having a communications device. However, the multicarrier modem can also be implemented in a special purpose computer, a programmed microprocessor or microcontroller and peripheral integrated circuit element, and ASIC or other integrated circuit, a digital signal processor, a hardwired or electronic or logic circuit such as a discrete element circuit, a programmable logic device such as a PLD, PLA, FPGA, PAL, or the like, and associated communications equipment. In general, any device capable of implementing a finite state machine that is in turn capable of implementing the flowchart illustrated in Fig. 2 can be used to implement the multicarrier modem 100 according to this invention.

[0048] Furthermore, a disclosed method may be readily implemented in software using object or object-oriented software development environment that provides portable source code that can be used on a variety of computers, workstations, or modem hardware platforms. Alternatively, the disclosed modem may be implemented partially or fully in hardware using standard logic circuits or a VLSI design. Other software or hardware can be used to implement the systems in accordance with this invention depending on the speed and/or efficiency requirements of the systems, the particular function, and the particular software or hardware systems or microprocessor or microcomputer systems being utilized. The multicarrier modem illustrated herein, however, can be readily implemented in hardware and/or software using any known or later developed systems or structures, devices and/or software by those of ordinary skill in the applicable art from the functional description provided herein and with a general basic knowledge of the computer and telecommunications arts.

[0049] Moreover, the disclosed methods can be readily implemented as software executed on a programmed general purpose computer, a special purpose computer, a microprocessor and associated communications equipment, or the like. In these instances, the methods and systems of this invention can be implemented as a program embedded on a modem, such as a DSL modem, or the like. The multicarrier modem can also be implemented by physically incorporating the system and method in a software and/or hardware system, such as a hardware and software system of a modem, such as an ADSL modem, or the like.

- 13 -

**[0050]** It is, therefore, apparent that there has been provided in accordance with the present invention, systems and methods for assigning margins to carriers. While this invention has been described in conjunction with a number of embodiments, it is evident that many alternatives, modifications and variations would be or are apparent to those of ordinary skill in the applicable art. Accordingly, Applicants intend to embrace all such alternatives, modifications, equivalents and variations that are within the spirit and the scope of this invention.

- 14 -

What is Claimed is:

1. A multicarrier modulation communication system comprising:  
a plurality of subchannels; and  
a plurality of margins.
2. The system of claim 1, wherein the plurality of margins are based on at least one of changes in the levels of a crosstalk, impulse noise, temperature changes, wire line length, radio frequency interference, a bit error rate, a signal to noise ratio, a seasonal change, statistical information, time information, day information and data rate information.
3. The system of claim 1, wherein the plurality of margins are at least one of an average margin and a subchannel specific margin.
4. The system of claim 3, wherein the average margin is applied equally to a portion of the plurality of subchannels.
5. The system of claim 1, further comprising a margin determiner that determines at least one margin.
6. The system of claim 1, further comprising a margin storage device that stores at least one margin.
7. A multicarrier modulation communication system comprising:  
a plurality of subchannels; and  
a plurality of margins, wherein one of the plurality of margins is assigned to at least one of the plurality of subchannels.
8. The system of claim 7, wherein the plurality of margins are based on at least one of changes in the levels of a crosstalk, impulse noise, temperature changes, wire line length, radio frequency interference, a bit error rate, a signal to noise ratio, a seasonal change, statistical information, time information, day information and data rate information.
9. The system of claim 7, wherein the plurality of margins are at least one of an average margin and a subchannel specific margin.
10. The system of claim 9, wherein the average margin is applied equally to a portion of the plurality of subchannels.
11. The system of claim 7, further comprising a margin determiner that determines at least one margin.



- 15 -

12. The system of claim 7, further comprising a margin storage device that stores at least one margin.

13. A multicarrier modulation communication system communicating on a wire line over a plurality of subchannels, wherein at least one margin based on a length of the wire line is assigned to at least one of the plurality of subchannels.

14. The system of claim 13, wherein the at least one margin is based on at least one of changes in the levels of a crosstalk, impulse noise, temperature changes, radio frequency interference, a bit error rate, a signal to noise ratio, a seasonal change, statistical information, time information, day information and data rate information.

15. The system of claim 13, wherein the at least one margin is based on at least one of an average margin and a subchannel specific margin.

16. The system of claim 15, wherein the average margin is applied equally to a portion of the plurality of subchannels.

17. The system of claim 13, further comprising a margin determiner that determines at least one margin.

18. The system of claim 13, further comprising a margin storage device that stores at least one margin.

19. A multicarrier modulation communication system having a plurality of subchannels, wherein at least two subchannels have a different margin.

20. The system of claim 19, wherein the margin is based on at least one of changes in the levels of a crosstalk, impulse noise, temperature changes, wire line length, radio frequency interference, a bit error rate, a signal to noise ratio, a seasonal change, statistical information, time information, day information and data rate information.

21. The system of claim 19, wherein the margins are at least one of an average margin and a subchannel specific margin.

22. The system of claim 21, wherein the average margin is applied equally to a portion of the at least two subchannels.

23. An information storage media comprising margin information for a multicarrier modulation system having a plurality of subchannels, wherein at least two subchannels have a different margin.

- 16 -

24. A method of enhancing multicarrier modulation communication over a plurality of subchannels comprising communicating over the plurality of subchannels using at least two different margins.

25. The method of claim 24, wherein the at least two margins are based on at least one of changes in the levels of a crosstalk, impulse noise, temperature changes, wire line length, radio frequency interference, a bit error rate, a signal to noise ratio, a seasonal change, statistical information, time information, day information and data rate information.

26. The method of claim 24, wherein the at least two margins are at least one of an average margin and a subchannel specific margin.

27. The method of claim 26, wherein the average margin is applied equally to a portion of the plurality of subchannels.

28. The method of claim 24, further comprising determining at least one margin.

29. The method of claim 24, further comprising storing at least one margin.

30. A method for multicarrier modulation communication over a plurality of subchannels comprising:

selecting a first number of the subchannels;

assigning a first margin to the first number of the subchannels;

selecting a second number of the subchannels; and

assigning a second margin to the second number of subchannels, wherein the first margin and the second margin are different.

31. The method of claim 30, wherein the margins are based on at least one of changes in the levels of a crosstalk, impulse noise, temperature changes, wire line length, radio frequency interference, a bit error rate, a signal to noise ratio, a seasonal change, statistical information, time information, day information and data rate information.

32. The method of claim 30, wherein the margins are at least one of an average margin and a subchannel specific margin.

33. The method of claim 32 wherein the average margin is applied equally to a portion of either the first or second number of subchannels.

34. The method of claim 30, further comprising a margin determiner that determines at least one margin.

35. The method of claim 30, further comprising a margin storage device that stores at least one margin.

- 17 -

36. A method for multicarrier modulation communication over a wire line using a plurality of subchannels, wherein at least one margin based on a length of the wire line is assigned to at least one of the plurality of subchannels.

37. The method of claim 36, wherein the at least one margin is based on at least one of changes in the levels of a crosstalk, impulse noise, temperature changes, radio frequency interference, a bit error rate, a signal to noise ratio, a seasonal change, statistical information, time information, day information and data rate information.

38. The method of claim 36, wherein the at least one margin is at least one of an average margin and a subchannel specific margin.

39. The method of claim 38, wherein the average margin is applied equally to a portion of the plurality of subchannels.

40. The method of claim 36, further comprising a margin determiner that determines at least one margin.

41. The method of claim 36, further comprising a margin storage device that stores at least one margin.

42. A method for communicating in a multicarrier modulation communications environment having at least two subchannels, wherein at least two of the at least two subchannels have a different margin.

43. The method of claim 42, wherein the margins are based on at least one of changes in the levels of a crosstalk, impulse noise, temperature changes, wire line length, radio frequency interference, a bit error rate, a signal to noise ratio, a seasonal change, statistical information, time information, day information and data rate information.

44. The method of claim 42, wherein the margins are at least one of an average margin and a subchannel specific margin.

45. The method of claim 42, wherein the average margin is applied equally to a portion of the at least two subchannels.

1/2

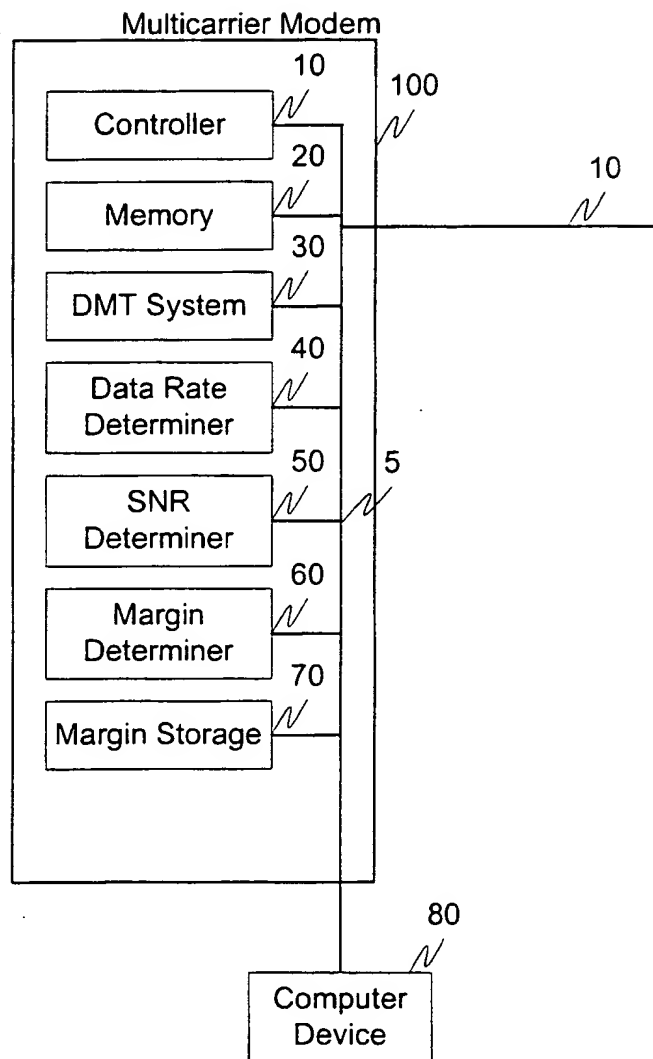


Fig. 1

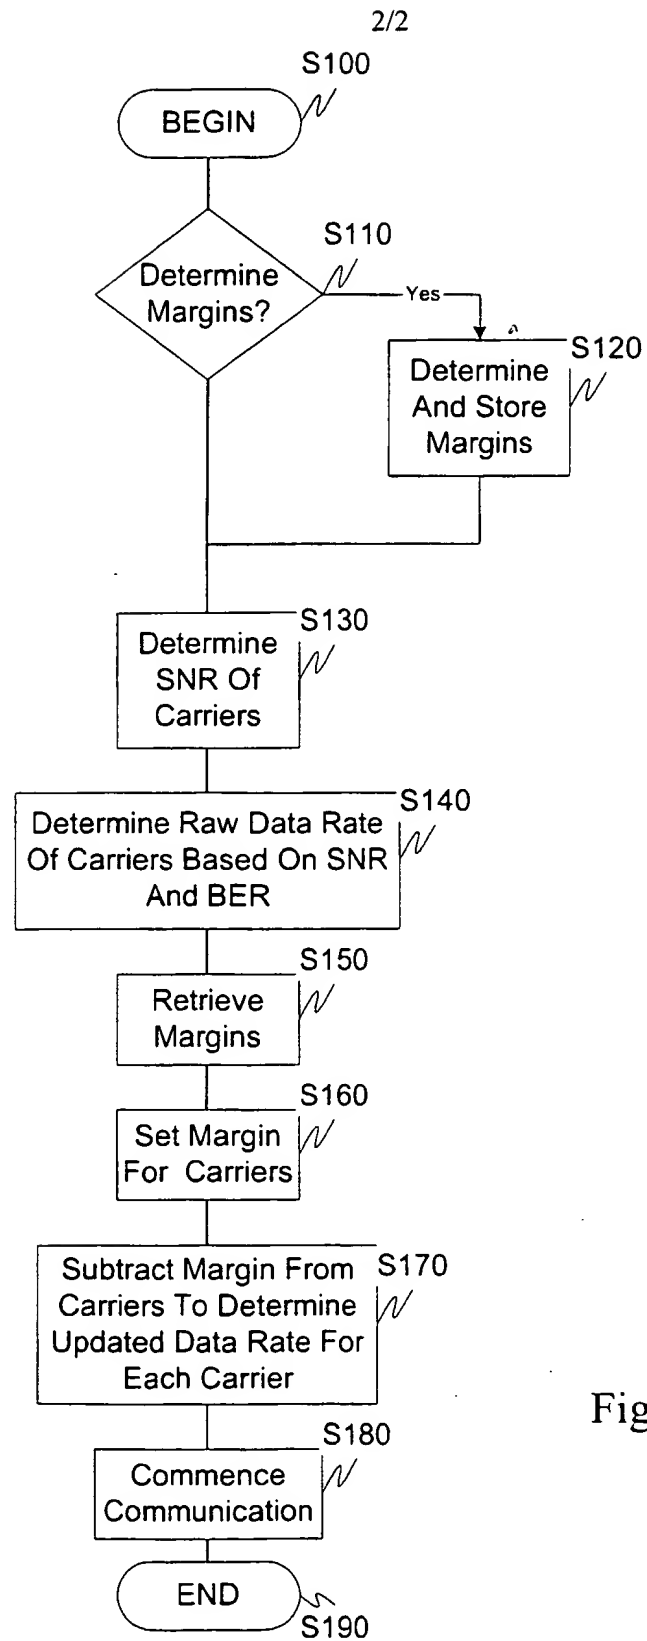


Fig. 2

# INTERNATIONAL SEARCH REPORT

National Application No

PCT/US 01/12555

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 H04L27/26

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ, WPI Data, INSPEC, COMPENDEX

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 99 20027 A (AWARE) 22 April 1999 (1999-04-22) page 11, line 18 - line 23 page 11, line 26	19-29
X	COLIN ET AL.: "QoS considerations for DMT-based ADSL and VDSL systems" IEEE INTERNATIONAL CONFERENCE ON ACOUSTICS, SPEECH AND SIGNAL PROCESSING, 12 - 15 May 1998, pages 3437-3440, XP000951196 New York, US ISBN: 0-7803-4429-4 page 3438, left-hand column, paragraph 4	19-29
X	EP 0 918 422 A (MOTOROLA INC) 26 May 1999 (1999-05-26) column 4, line 6 - line 17	19-29
	-/-	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*G\* document member of the same patent family

Date of the actual completion of the international search

26 September 2001

Date of mailing of the international search report

09/10/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Scriven, P

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/US 01/12555

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 822 374 A (LEVIN) 13 October 1998 (1998-10-13) figure 3	19-29
X	EP 0 955 744 A (NEC) 10 November 1999 (1999-11-10) page 25, line 30 - line 31 page 26, line 15 - line 19	19-29
A	WO 98 57472 A (AWARE) 17 December 1998 (1998-12-17) page 5, line 10 - line 11	19, 23, 24
A	"Spectrum management for loop transmission systems" ANSI DRAFT, 'Online! 1999, pages 1-110, XP002178517 Retrieved from the Internet: <URL:http://ftp.tiaonline.org/tr-41/TR419/ WORKING/8-99/-046%20T1E1.pdf> 'retrieved on 2001-09-26! paragraph '4.3.5.1!	20, 25

## FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

Continuation of Box I.2

Claims Nos.: 1-18, 30-45

In view of the large number of independent claims, and also of their wording, which renders it difficult, if not impossible, to determine the matter for which protection is sought, the present application fails to comply with the clarity and conciseness requirements of Article 6 PCT (see also Rule 6.1(a) PCT) to such an extent that a meaningful search is impossible. Consequently, the search has been carried out for those parts of the application which do appear to be clear and concise, namely claims 19-29. These claims define the use of at least two different margins. This feature is essential, as is specified in paratraph '0012! of the description.

The applicant's attention is drawn to the fact that claims, or parts of claims, relating to inventions in respect of which no international search report has been established need not be the subject of an international preliminary examination (Rule 66.1(e) PCT). The applicant is advised that the EPO policy when acting as an International Preliminary Examining Authority is normally not to carry out a preliminary examination on matter which has not been searched. This is the case irrespective of whether or not the claims are amended following receipt of the search report or during any Chapter II procedure.



# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 01/12555

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 9920027	A	22-04-1999	AU 1077699 A EP 1021901 A2 WO 9920027 A2	03-05-1999 26-07-2000 22-04-1999
EP 0918422	A	26-05-1999	US 6122247 A EP 0918422 A2	19-09-2000 26-05-1999
US 5822374	A	13-10-1998	NONE	
EP 0955744	A	10-11-1999	JP 2000031936 A AU 2699299 A CN 1235438 A EP 0955744 A2	28-01-2000 18-11-1999 17-11-1999 10-11-1999
WO 9857472	A	17-12-1998	US 6072779 A AU 7827398 A EP 1013043 A1 WO 9857472 A1	06-06-2000 30-12-1998 28-06-2000 17-12-1998

***This Page Blank (uspto)***

CORRECTED VERSION

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
25 October 2001 (25.10.2001)

(10) International Publication Number  
PCT  
WO 01/80510 A1

(51) International Patent Classification<sup>7</sup>: H04L 27/26

(74) Agent: VICK, Jason, H.: Nixon Peabody LLP, Suite 800,  
8180 Greensboro Drive, McLean, VA 22102 (US).

(21) International Application Number: PCT/US01/12555

(22) International Filing Date: 18 April 2001 (18.04.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/197,727 18 April 2000 (18.04.2000) US

(71) Applicant: AWARE, INC. [US/US]: 40 Middlesex Turn-  
pike, Bedford, MA 01730 (US).

(72) Inventor: TZANNES, Marcos, C.: 121 LaEspiral,  
Orinda, CA 94563 (US).


(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ,  
DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR,  
HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR,  
LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ,  
NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM,  
TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian  
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European  
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,  
IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF,  
CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: DATA ALLOCATION WITH VARIABLE SNR MARGINS

(57) Abstract: A multicarrier modem has a plurality of carriers over which data is transmitted. By assigning one or more different margins to the individual carriers, the data rate and impairment immunity can be increased.

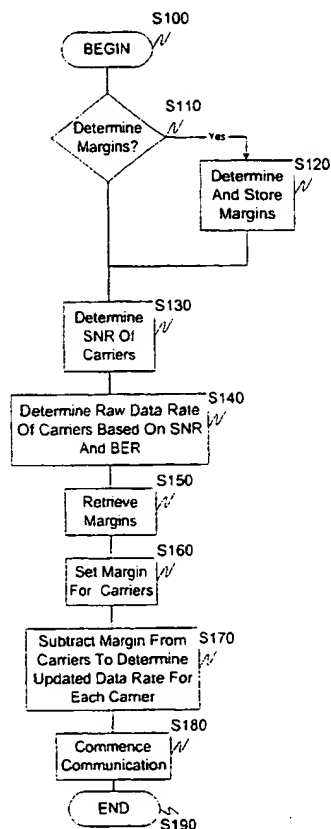

WO 01/80510 A1



**Published:**

— with international search report

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**(48) Date of publication of this corrected version:**

3 January 2002

**(15) Information about Correction:**

see PCT Gazette No. 01/2002 of 3 January 2002, Section II